


PLAN

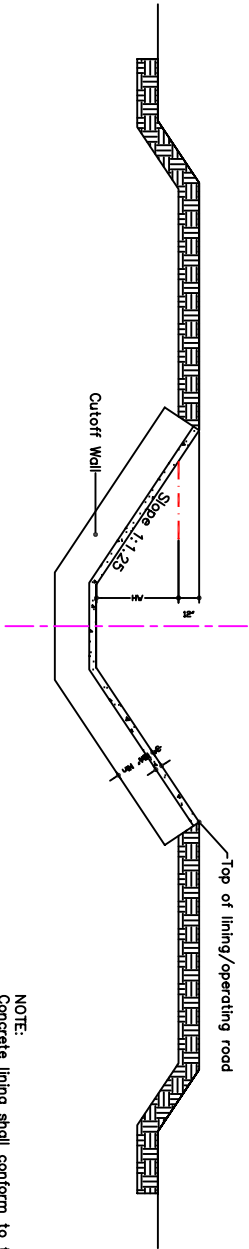

SECTION

NOTE:
 Concrete lining shall conform to the minimum standards of paragraph 4.0 of the Design Criteria.
 Lining shall match existing channel cross-section.
 Top of lining shall be minimum 12" above high water elevation.
 Construction of cutoff wall shall be normal to centerline of channel.
 Reinforce concrete lining with 6x6/W4xW/4 welded wire fabric or reinforced concrete fiber.
 Concrete shall be minimum 3000 psi.
 Dimension "B", "Width" and "High Water" shall be determined by the Irrigation District.

REVISIONS		
NO.	DATE	REMARKS

ELEPHANT BUTTE IRRIGATION DISTRICT

DESIGNED	
DRAWN	
CHECKED	
APPROVED	

TYPICAL CONCRETE LINING
 CANALS - LATERALS - DRAINS

DATE	
SCALE	
SHEET	OF



ENG JOB NUMBER

DRAWING NUMBER