


PLAN

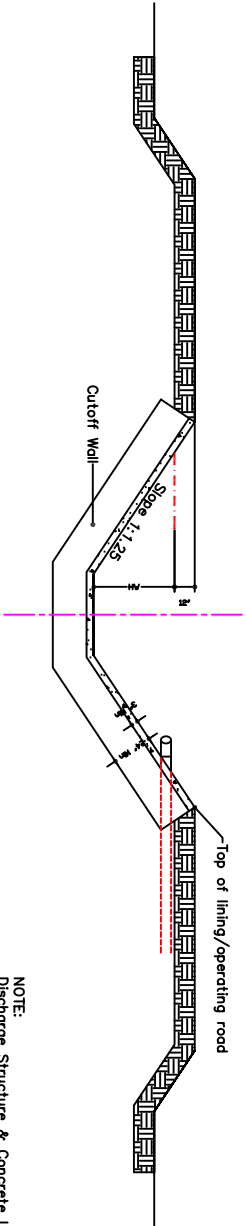

SECTION

NOTE:
 Discharge Structure & Concrete Lining shall conform to the minimum standards of paragraph 4.0 & 6.0 of the Design Criteria.
 Lining shall match existing channel cross-section.
 Top of lining shall be minimum 12" above high water elevation.
 Construction of cutoff wall shall be normal to centerline of channel.
 Reinforce concrete lining with 6x6/W 4xW 4 welded wire fabric or reinforced concrete fiber.
 Concrete shall be minimum 3000 psi.
 Dimension "B", "Width" and "High Water" shall be determined by the Irrigation District.

REVISIONS NO. DATE REMARKS		ELEPHANT BUTTE IRRIGATION DISTRICT		DISCHARGE STRUCTURES CANALS - LATERALS - DRAINS		DATE SCALE SHEET OF		F
DESIGNED		DRAWN		CHECKED		APPROVED		
ENG JOB NUMBER		DRAWING NUMBER						